



**HOLY LIGHTING TECHNOLOGY CO., LTD**



# **Company Profile**

Shenzhen Holy lighting Technology Co., Ltd. is established in 2003, a market-leading innovator and professional LED manufacturer, focusing on commercial lighting solution and office lighting solution.

We have more than 500 employees, plant area of 20,000 square meters, more than 40 research and development team with rich experience in LED lighting field.

Our main products include:

- Commercial lighting solution.  
LED spotlight, LED ceiling downlight, LED track light.
- Office lighting solution.  
LED downlight, LED tube, LED panel light.
- Light source lighting.  
LED bulb, LED PL G24, LED candle light, LED corn light, R7S, G9.

Main Advantages:

- Special designed Color temperatures items with own 8 years experience in encapsulation;
- 15-25days to finish the new hand-made sample design in our brother mould factory, NDA available;
- 12-18 days against order confirmation for repeat orders in 3 specialized manufacturing center





# LED SPOTLIGHT



## LED Spotlight 4W

### Features:

- Best-selling 4W COB spotlight.
- Many choices for the base, GU10, MR16, GU5.3, E27.
- Low Heat, low power consumption/High-brightness.
- No RF interference, no IR/UV radiation ,no mercury pollution.
- Strict quality check process, neutral Package, white box package, or customer color box package upon requirements.

### Application:

- Widely used in the hotels, meeting rooms, offices, hospitals, schools, factories, commercial lighting, shopping malls, supermarkets, kitchen, display, backlights, home indoor lighting and more.



Model	Power	Size	LED Type	Beam Angle
H-S-C1604A	4W	φ50*58mm	COB	25°
H-S-C1604B	4W	φ50*58mm	COB	45°

## LED Spotlight 5W/7W

### Features:

- Environment Friendly ,Energy Saving (70~80%).
- Low Heat, low power consumption/High-brightness.
- No RF interference, no IR/UV radiation ,no mercury pollution.
- Strict quality check process, neutral Package, white box package, or customer color box package upon requirements.

### Application:

- Widely used in the hotels, meeting rooms, offices, hospitals, schools, factories, commercial lighting, shopping malls, supermarkets, kitchen, display, backlights, home indoor lighting and more.



Model	Power	Size	LED Type	Beam Angle
H-S-C1605C	5W	φ50*58mm	COB	60°/80°
H-S-C1607B	7W	φ50*75mm	COB	60°/80°

## LED Spotlight 5W

### Features:

- Car Aluminum, easy heat dissipation.
- Replace 50 w halogen spotlight.
- CE, RoHS, ErP Certifications.
- Low heat, low power consumption/High-brightness.

### Application:

- Generally matching in downlight, ceiling light, household lighting, shopping, lighting, specialty lighting, hotel lighting, office lighting, home light; Commercial show windows and bars, airport, subway, cloverleaf junction and architecture field



Model	Power	Size	LED Type	Beam Angle
H-S-C1605A	5W	φ50*58mm	COB	40°

## SMD Spotlight 5W

### Features:

- Low-heat, no UV, IR.
- Lifespan: 50,000 hours.
- Appearance: four style choose.
- Working voltage: AC85 to 265V, 50/60Hz, 12V AC/DC.
- Base type: GU10/E26/E27/GU5.3.
- lead time: 7 days, 2 years warranty.

### Application:

- Widely used in the hotels, meeting rooms, offices, hospitals, schools, factories, commercial lighting, shopping malls, supermarkets, kitchen, display, backlights, home indoor lighting and more.



Model	Power	Size	LED Type	Beam Angle
H-S-S1605A	5W	φ50*56mm	SMD2835	120°
H-S-C1604B	5W	φ50*56mm	SMD2835	120°
H-S-S1605C	5W	φ50*56mm	SMD2835	120°
H-S-S1605D	5W	φ50*56mm	SMD2835	120°

## SMD Spotlight 5W/7W

### Features:

- Using New LED COB Technology as light source, Epistar LED chip, high rendering index, high brightness.
- Adopt constant current driver, stable and no flick.
- Widely used in commercial lighting and home lighting.
- Retrofit Size - The spots are the same size as a traditional GU10 Halogen, so they will fit into most already installed fittings.
- A+ energy rating. Can replace the conventional spotlight.

### Application:

- Home and office lighting, commercial and industrial lighting, school and college lighting, showcase lighting, bar lighting, display case accent, art working lighting, warehouse lighting, hotel and restaurant lighting



Model	Power	Size	LED Type	Beam Angle
H-S-S1605E	5W	φ50*58mm	SMD2835	25°/45°
H-S-S1607	7W	φ50*75mm	SMD2835	25°/45°



# LED DOWNLIGHT

## Anti-dazzle LED Downlight

### Features:

- Epistar Chip COB LED, high brightness and low light decay;
- Adopt transparent optical principle and anti dazzle design, avoid the glare effectively;
- Easy installation, efficient LED replacement for PLC downlight;
- CE, RoHS, SAA approved.

### Application:

- Shopping mall, supermarket, office, hotel, Lobby, show room, exhibition hall, gymnasium.



Model	Power	Dimension	Cut Out	LED Type
H-D-C25FX03	3W	φ85*45mm	φ70mm	COB
H-D-C30FX05	5W	φ105*50mm	φ90mm	COB
H-D-C30FX07	7W	φ105*50mm	φ90mm	COB
H-D-C40FX12	12W	φ130*48mm	φ110mm	COB
H-D-C50FX15	15W	φ160*50mm	φ145mm	COB
H-D-C60FX18	18W	φ190*52mm	φ170mm	COB
H-D-C80FX30	30W	φ220*55mm	φ202mm	COB

## Antifog LED Downlight

### Features:

- Epistar Chip SMD LED, high brightness and low light decay;
- Anti fog milky cover design, making light evenly distributed, soft and comfortable;
- Easy installation, efficient LED replacement for PLC downlight;
- Body and driver are integrated, very competitive price.

### Application:

- Shopping mall, supermarket, office, hotel, Lobby, show room, exhibition hall, gymnasium.



Model	Power	Dimension	Cut Out	LED Type
H-D-S25KS04C	4W	φ100*57.5mm	φ85mm	SMD 2835
H-D-S30KS04C	4W	φ108*70.5mm	φ95mm	SMD 2835
H-D-S35KS06C	6W	φ121*70.5mm	φ105mm	SMD 2835
H-D-S40KS08C	8W	φ141*70.5mm	φ125mm	SMD 2835
H-D-S50KS13C	13W	φ178*72.8mm	φ160mm	SMD 5730
H-D-S60KS16C	16W	φ194*72.8mm	φ175mm	SMD 5730
H-D-S80KS20C	20W	φ230*72mm	φ205mm	SMD 5730



## Classic LED Downlight

### Features:

- Epistar Chip COB LED, high brightness and low light decay;
- Reflector covers make uniform illuminance, no light spot, no dark space;
- Easy installation, efficient LED replacement for PLC downlight;
- Classic appearance design, milky cover, making light soft and comfortable.

### Application:

- Shopping mall, supermarket, office, hotel, Lobby, show room, exhibition hall, gymnasium.



Model	Power	Dimension	Cut Out	LED Type
H-D-C25KS04	4W	φ102*76mm	φ85mm	1 PCS COB
H-D-C30KS04	4W	φ108*85mm	φ95mm	1 PCS COB
H-D-C35KS06	6W	φ122*85mm	φ105mm	1 PCS COB
H-D-C40KS08	8W	φ143*85mm	φ125mm	1 PCS COB
H-D-C50KS13	13W	φ180*103mm	φ150mm	1 PCS COB
H-D-C60KS16	16W	φ191*108mm	φ170mm	1 PCS COB
H-D-C80KS20	20W	φ230*138mm	φ205mm	1 PCS COB

## Ultrathin LED Downlight

### Features:

- Imported high quality covers, soft and uniform light, perfect transmission.
- High-strength aluminum alloy frame, no reflective, anti-static electricity.
- Super thickness aluminum alloy.
- Waterproof and glue ballast.

### Application:

- Shopping mall, supermarket, office, hotel, Lobby, show room, exhibition hall, gymnasium.



Model	Power	Dimension	Cut Out	LED Type
H-D-S20KS03D	3W	φ85*13mm	φ70mm	SMD 2835
H-D-S20KS04D	4W	φ110*13mm	φ90mm	SMD 2835
H-D-S30KS06D	6W	φ120*13mm	φ105mm	SMD 2835
H-D-S40KS09D	9W	φ145*13mm	φ130mm	SMD 2835
H-D-S50KS12D	12W	φ170*13mm	φ155mm	SMD 2835
H-D-S60KS15D	15W	φ200*13mm	φ180mm	SMD 2835
H-D-S80KS18D	18W	φ225*13mm	φ200mm	SMD 2835
H-D-S80KS20D	20W	φ240*13mm	φ220mm	SMD 2835
H-D-S80KS24D	24W	φ300*13mm	φ280mm	SMD 2835

## LED Ceiling Downlight

### Features:

- Vacuum aluminum reflector, high temperature resistance and high reflective.
- Advanced aluminum radiator, effectively solve the heat dissipation problem.
- According to their own style and uses of result, you can adjust the lighting angle.
- With high quality aerospace, aluminum, polish, never fade.

### Application:

- Shopping mall, supermarket, office, hotel, Lobby, show room, exhibition hall, gymnasium.

Model	Power	Dimension	Cut Out	LED Type
H-C-C1104	4W	φ72.5*44mm	φ55mm	1 PCS COB
H-C-C1604	4W	φ84*45mm	φ72mm	1 PCS COB
H-C-C1606	6W	φ84*45mm	φ72mm	1 PCS COB
H-C-C7008	8W	φ110*63mm	φ95mm	1 PCS COB
H-C-C7010	10W	φ110*63mm	φ95mm	1 PCS COB
H-C-C8013	13W	φ121*73mm	φ105mm	1 PCS COB
H-C-C8016	16W	φ121*73mm	φ105mm	1 PCS COB
H-C-C11120	20W	φ156*90mm	φ140mm	1 PCS COB
H-C-C11126	26W	φ156*90mm	φ140mm	1 PCS COB
H-C-C11130	30W	φ156*90mm	φ140mm	1 PCS COB





# LED BULBS

## SAA LED Bulbs Series A

### Features:

- High brightness and low light decline LED.
- High quality and exceptional heat dissipation.
- Energy saving (up to 90%) & carbon saving.
- Life span more than 50,000hrs, 2 years warranty.
- LED Bulb light SAA, CE, RoHS certification.

### Application:

- Suitable for residential and commercial lighting, such as hotel, hall, restaurant, art hall, museum, office, reading room, showcase, entertainment place etc.



Model	Power	Size	LED Type	Beam Angle
H-B-SA6006	6W	φ60*110mm	SMD 5630	140°
H-B-SA6008	8W	φ60*110mm	SMD 5630	140°
H-B-SA6010	10W	φ60*110mm	SMD 5630	140°
H-B-SA6012	12W	φ63*125mm	SMD 5630	140°

## SAA LED Bulbs Series B

### Features:

- High brightness and low light decline LED.
- High quality and exceptional heat dissipation.
- Energy saving (up to 90%) & carbon saving.
- Life span more than 50,000hrs, 2 years warranty.
- LED Bulb light SAA, CE, RoHS certification.

### Application:

- Suitable for residential and commercial lighting, such as hotel, hall, restaurant, art hall, museum, office, reading room, showcase, entertainment place etc.



Model	Power	Size	LED Type	Beam Angle
H-B-SA6006	6W	φ60*125mm	SMD 5630	270°
H-B-SA6008	8W	φ60*125mm	SMD 5630	270°
H-B-SA6010	10W	φ60*125mm	SMD 5630	270°
H-B-SA6012	12W	φ60*125mm	SMD 5630	270°



## LED Bulbs 5-9W

### Features:

- High brightness and low light decline LED.
- High quality and exceptional heat dissipation.
- Energy saving (up to 90%) & carbon saving.
- Life span more than 50, 000hrs, 2 years warranty.
- LED Bulb light SAA, CE, RoHS certification.

### Application:

- Suitable for residential and commercial lighting, such as hotel, hall, restaurant, art hall, museum, office, reading room, showcase, entertainment place etc.



Model	Power	Size	LED Type	Beam Angle
H-B-SA5005B	5W	φ50*100mm	SMD 5630	140°
H-B-SA6007B	7W	φ60*110mm	SMD 5630	140°
H-B-SA6009B	9W	φ60*110mm	SMD 5630	140°

## LED Bulbs 12W-18W

### Features:

- High brightness and low light decline LED.
- High quality and exceptional heat dissipation.
- Energy saving (up to 90%) & carbon saving.
- Life span more than 50, 000hrs, 2 years warranty.
- LED Bulb light SAA, CE, RoHS certification.

### Application:

- Suitable for residential and commercial lighting, such as hotel, hall, restaurant, art hall, museum, office, reading room, showcase, entertainment place etc.



Model	Power	Size	LED Type	Beam Angle
H-B-SA6512	12W	φ67*124mm	SMD 5630	140°
H-B-SA7015	15W	φ73*135mm	SMD 5630	140°
H-B-SA7818	18W	φ78*156mm	SMD 5630	140°

## LED Bulbs Philip Style

### Features:

- High brightness and low light decline LED.
- High quality and exceptional heat dissipation.
- Energy saving (up to 90%) & carbon saving.
- Life span more than 50,000hrs, 2 years warranty.
- LED Bulb light SAA, CE, RoHS certification.

### Application:

- Suitable for residential and commercial lighting, such as hotel, hall, restaurant, art hall, museum, office, reading room, showcase, entertainment place etc.



Model	Power	Size	LED Type	Beam Angle
H-B-SA6006C	6W	φ57*102mm	SMD 5630	140°
H-B-SA6008C	8W	φ57*102mm	SMD 5630	140°
H-B-SA6710C	10W	φ67*127mm	SMD 5630	140°
H-B-SA6712C	12W	φ67*127mm	SMD 5630	140°

## E14 Candle Light

### Features:

- Better transmittance, Clear glass & plastic shell material, soft and uniform light, stable and safety.
- Bulb shells adopt high thermal conductivity of aluminum, High-efficiency thermal dissipation.
- Saving 80 percent energy, no stroboflash.
- E14 E27 base easy installation, low light failure, long life.

### Application:

- Suitable for Home, Office, Display Case, Under Cabinet and Art Lighting



Model	Power	Size	LED Type	Beam Angle
HL-6L3WF1	3.5±0.5W	φ35*118mm	SMD5630	360°
HL-6L3WF3	3.5±0.5W	φ40*86mm	SMD5630	360°
HL-10L5WF	5±0.5W	φ30*130mm	SMD5630	360°

## G24 PL LED

### Features:

- Choose Well-known brand Taiwan Chip, only 20% power consumption of halogen lamp;
- Easy installation, Can be directly replace the traditional light;
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra;
- Long lifespan >35000hours, 30 times of Filament Lamp;
- CE ROHS certification, 2 years warranty.

### Application:

- Shopping malls, Hotel, entertainment place, Saloon, coffee house, photography area, living room lighting



Model	Power	Size	LED Type	Beam Angle
H-B-SG2408A	8W	151mm (G24) 155mm (E27)	SMD 2835	120°
H-B-SG24011A	11W	167mm (G24) 171mm (E27)	SMD 2835	120°
H-B-SG2408B	8W	151mm (G24) 155mm (E27)	SMD 5050	120°
H-B-SG24011B	11W	167mm (G24) 171mm (E27)	SMD 5050	120°

## LED Corn Light

### Features:

- 80% more energy saving compared with conventional lights
- Special surface design for super heat dissipation
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra;
- Long lifespan >35000hours
- CE RoHS certification, 2 years warranty

### Application:

- Warehouse, indoor lighting, street landscape, meeting rooms, schools, institution buildings



Model	Power	Size	LED Type	Beam Angle
HL-CL5730-5W	5W	φ36*110mm	SMD 5730	360°
HL-CL5730-7W	7W	φ36*110mm	SMD 5730	360°
HL-CL5730-10W	10W	φ60*130mm	SMD 5730	360°
HL-CL5730-16W	16W	φ60*130mm	SMD 5730	360°

## High Power Corn Light

### Features:

- 80% more energy saving compared with conventional lights
- Special surface design for super heat dissipation
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra;
- Long lifespan >35000hours
- CE RoHS certification, 2 years warranty

### Application:

- Warehouse, indoor lighting, street landscape, meeting rooms, schools, institution buildings



Model	Power	Size	LED Type	Beam Angle
HL-CL3528-15	15W	φ73*150mm	SMD 3528	360°
HL-CL3528-20	20W	φ73*205mm	SMD 3528	360°
HL-CL3528-30	30W	φ90*210mm	SMD 3528	360°
HL-CL3528-40	40W	φ90*255mm	SMD 3528	360°
HL-CL3528-60	60W	φ90*270mm	SMD 3528	360°
HL-CL3528-80	80W	φ90*290mm	SMD 3528	360°
HL-CL3528-100	100W	φ105*310mm	SMD 3528	360°
HL-CL3528-120	120W	φ112*335mm	SMD 3528	360°





## LED G4 & G9

## Silicone LED G4

### Features:

- Directly replace original filament G4 bulb.
- Small size, good heat dissipation.
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra.
- Long lifespan >35000hours.
- CE RoHS certification.

### Application:

- Shopping mall, hotel, office lighting, home light, commercial show windows and bars, airport, subway.



Model	Power	Size	LED Type	Beam Angle
H-B-SG41.5	1.5W	φ9.5*25mm (with pins 35mm)	SMD 3014	360°
H-B-SG403	3W	φ16*32mm (with pins 42mm)	SMD 3014	360°

## Silicone LED G9

### Features:

- Directly replace original filament G9 bulb.
- Small size, good heat dissipation.
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra.
- Long lifespan >35000hours.
- CE RoHS certification.

### Application:

- Shopping mall, hotel, office lighting, home light, commercial show windows and bars, airport, subway.



Model	Power	Size	LED Type	Beam Angle
H-B-SG903	3W	φ16*32mm (with pins 42mm)	SMD 3014	360°
H-B-SG905	5W	φ16*32mm (with pins 42mm)	SMD 3014	360°

## LED G4

### Features:

- Directly replace original filament G4 bulb.
- Small size, good heat dissipation.
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra.
- Long lifespan >35000hours.
- CE RoHS certification.

### Application:

- Shopping mall, hotel, office lighting, home light, commercial show windows and bars, airport, subway.

Model	Power	Size	LED Type	Beam Angle
H-B-SG401A	1W	φ10*19mm	SMD 3528	360°
H-B-SG41.5A	1.5W	φ27mm	SMD 3528	120°
H-B-SG41.5A	1.5W	φ10*22mm	SMD 3528	360°
H-B-SG401B	1W	φ23mm	SMD 5050	120°
H-B-SG41.5B	1.5W	φ25mm	SMD 5050	120°
H-B-SG41.5C	1.5W	φ10*20mm	SMD 5050	360°
H-B-SG41.8B	1.8W	φ30mm	SMD 5050	120°
H-B-SG402B	2W	φ30mm	SMD 5050	120°
H-B-SG42.5B	2.5W	φ45mm	SMD 5050	120°
H-B-SG403B	3W	φ19*30mm	SMD 5050	360°



## LED G9

### Features:

- Directly replace original filament G9 bulb.
- Small size, good heat dissipation.
- Customized choice for color temperature, range from 2700K to 6000K , CRI ≥80Ra.
- Long lifespan >35000hours.
- CE RoHS certification.

### Application:

- Shopping mall, hotel, office lighting, home light, commercial show windows and bars, airport, subway.

Model	Power	Size	LED Type	Beam Angle
H-B-SG903	3W	φ31*66mm	SMD 5050	360°
H-B-SG93.2	3.2W	φ31*66mm	SMD 5050	360°
H-B-SG904	4W	φ31*66mm	SMD 5050	360°
H-B-SG94.2	4.2W	φ31*66mm	SMD 5050	360°
H-B-SG905	5W	φ31*75mm	SMD 5050	360°
H-B-SG903B	3W	φ31*66mm	SMD 3528	360°
H-B-SG904B	4W	φ31*75mm	SMD 3528	360°





# LED TUBE & PANEL LIGHT



## LED T5 Tube

### Features:

- Can be directly placed in conventional T8 fluorescent brackets, no need for ballast and starter.
- Round and the elliptical tube are available.
- Low power consumption, long lifespan ,good stability.
- High-grade PC cover with nice light transmittance.

### Application:

- Residential building, office, school, factory, hotel, commercial center, supermarket etc.



Model	Power	Size	LED Type	Beam Angle
H-T-ST505	5W	φ29*300mm	SMD 2835	160°
H-T-ST509	9W	φ29*600mm	SMD 2835	160°
H-T-ST513	13W	φ29*900mm	SMD 2835	160°
H-T-ST515	15W	φ29*1000mm	SMD 2835	160°
H-T-ST518	18W	φ29*1200mm	SMD 2835	160°

## LED T8 Tube

### Features:

- Can be directly placed in conventional T8 fluorescent brackets, no need for ballast and starter.
- Round and the elliptical tube are available.
- Low power consumption, long lifespan ,good stability.
- High-grade PC cover with nice light transmittance.

### Application:

- Residential building, office, school, factory, hotel, commercial center, supermarket etc.



Model	Power	Size	LED Type	Beam Angle
H-T-ST809	9W	φ26*600mm	SMD 2835	160°
H-T-ST818	18W	φ26*1200mm	SMD 2835	160°
H-T-ST824	24W	φ26*1500mm	SMD 2835	160°

## UL & TUV LED T8 Tube

### Features:

- Can be directly placed in conventional T8 fluorescent brackets, no need for ballast and starter.
- Low power consumption, long lifespan, good stability.
- High-grade PC cover with nice light transmittance.
- CE, RoHS & UL Approved.

### Application:

- Residential building, office, school, factory, hotel, commercial center, supermarket etc.



Model	Power	Size	LED Type	Beam Angle
H-T-ST809B	9W	φ26*600mm	SMD 2835	160°
H-T-ST809C	9W	φ26*600mm	SMD 2835	160°
H-T-ST818B	18W	φ26*1200mm	SMD 2835	160°
H-T-ST818C	18W	φ26*1200mm	SMD 2835	160°
H-T-ST822A	22W	φ26*1200mm	SMD 2835	160°
H-T-ST822B	22W	φ26*1500mm	SMD 2835	160°

## LED Panel Light

### Features:

- No start-up time, no flickering, no humming.
- Aluminum housing, resistant to damage and excellent heat dissipation, and recyclable.
- Isolated and Non-isolated driver are available.
- High efficiency and power factor.
- CE and RoHS Approved.

### Application:

- Warehouse, office, home, shopping mall, exhibition hall, gymnasium, etc.



Model	Power	Size	LED Type	Beam Angle
H-P-S303018	18W	300*300*11.5mm	SMD 2835	120°
H-P-S303024	24W	300*300*11.5mm	SMD 2835	120°
H-P-S306024	24W	300*600*11.5mm	SMD 2835	120°
H-P-S306030	30W	300*600*11.5mm	SMD 2835	120°
H-P-S606036	36W	600*600*11.5mm	SMD 2835	120°
H-P-S606040	40W	600*600*11.5mm	SMD 2835	120°
H-P-S606048	48W	600*600*11.5mm	SMD 2835	120°
H-P-S3012040	40W	300*1200*11.5mm	SMD 2835	120°
H-P-S3012048	48W	300*1200*11.5mm	SMD 2835	120°



# LED FLOOD LIGHTS

## LED Flood Lights

### Features:

- Installed directly with inductive ballast.
- life span: more than 50,000 hours.
- Energy saving more than 80%.
- Low Lumen Depreciation.
- Brighter than traditional fluorescent lamps.

### Application:

- Illumination lighting for buses, trains, warehouses, parking lots etc;
- Back lighting for square billboards or advertisement boards.



Model	Power	Size	LED Type	Beam Angle
H-F-C10	10W	L115*W90*D85mm	COB	120°
H-F-C30	30W	L115*W90*D85mm	COB	120°
H-F-C50	50W	L285*W235*D160mm	COB	120°
H-F-C70	70W	L290*W360*D120mm	COB	120°
H-F-C100	100W	L290*W360*D120mm	COB	120°
H-F-C150	150W	L330*W410*D120mm	COB	120°
H-F-C200	200W	L580*W285*D113mm	COB	120°



## RGB LED Flood Lights

### Features:

- Installed directly with inductive ballast.
- life span: more than 50,000 hours.
- Energy saving more than 80%.
- Low Lumen Depreciation.
- Brighter than traditional fluorescent lamps.

### Application:

- Illumination lighting for buses, trains, warehouses, parking lots etc;
- Back lighting for square billboards or advertisement boards.



Model	Power	Size	LED Type	Beam Angle
H-F-C10RGB	10W	L115*W90*D85mm	COB	120°
H-F-C30RGB	30W	L225*W185*D125mm	COB	120°
H-F-C50RGB	50W	L225*W185*D125mm	COB	120°
H-F-C100RGB	100W	L290*W360*D120mm	COB	120°

## SMD Flood Lights

### Features:

- Installed directly with inductive ballast.
- life span: more than 50,000 hours.
- Energy saving more than 80%.
- Low Lumen Depreciation.
- Brighter than traditional fluorescent lamps.

### Application:

- Illumination lighting for buses, trains, warehouses, parking lots etc;
- Back lighting for square billboards or advertisement boards.



Model	Power	Size	LED Type	Beam Angle
H-F-S10	10W	120*125mm	SMD 5630	120°
H-F-S20	20W	120*125mm	SMD 5630	120°
H-F-S30	30W	120*125mm	SMD 5630	120°
H-F-S50	50W	270*285mm	SMD 5630	120°
H-F-S70	70W	370*285*85mm	SMD 5630	120°
H-F-S100	100W	370*285*105mm	SMD 5630	120°

## Rechargeable Flood Lights

### Features:

- Emergency time: 2-4 hours.
- Charging time: 3-5 hours.
- Die-casting aluminum body.
- High quality tempered glass.
- With AC100-240V standard wall plug charger + DC12V Car Charger.


### Application:

- Mainly applicable to square, park, courtyard, gardens, small signs, parking lot, gymnasium, flyovers, monument, etc.



Model	Power	Size	LED Type	Beam Angle
H-W-C10	10W	115*85*105mm	COB	120°
H-W-C20	20W	225*185*230mm	COB	120°
H-W-C30	30W	225*185*230mm	COB	120°
H-W-C50	50W	285*235*140mm	COB	120°



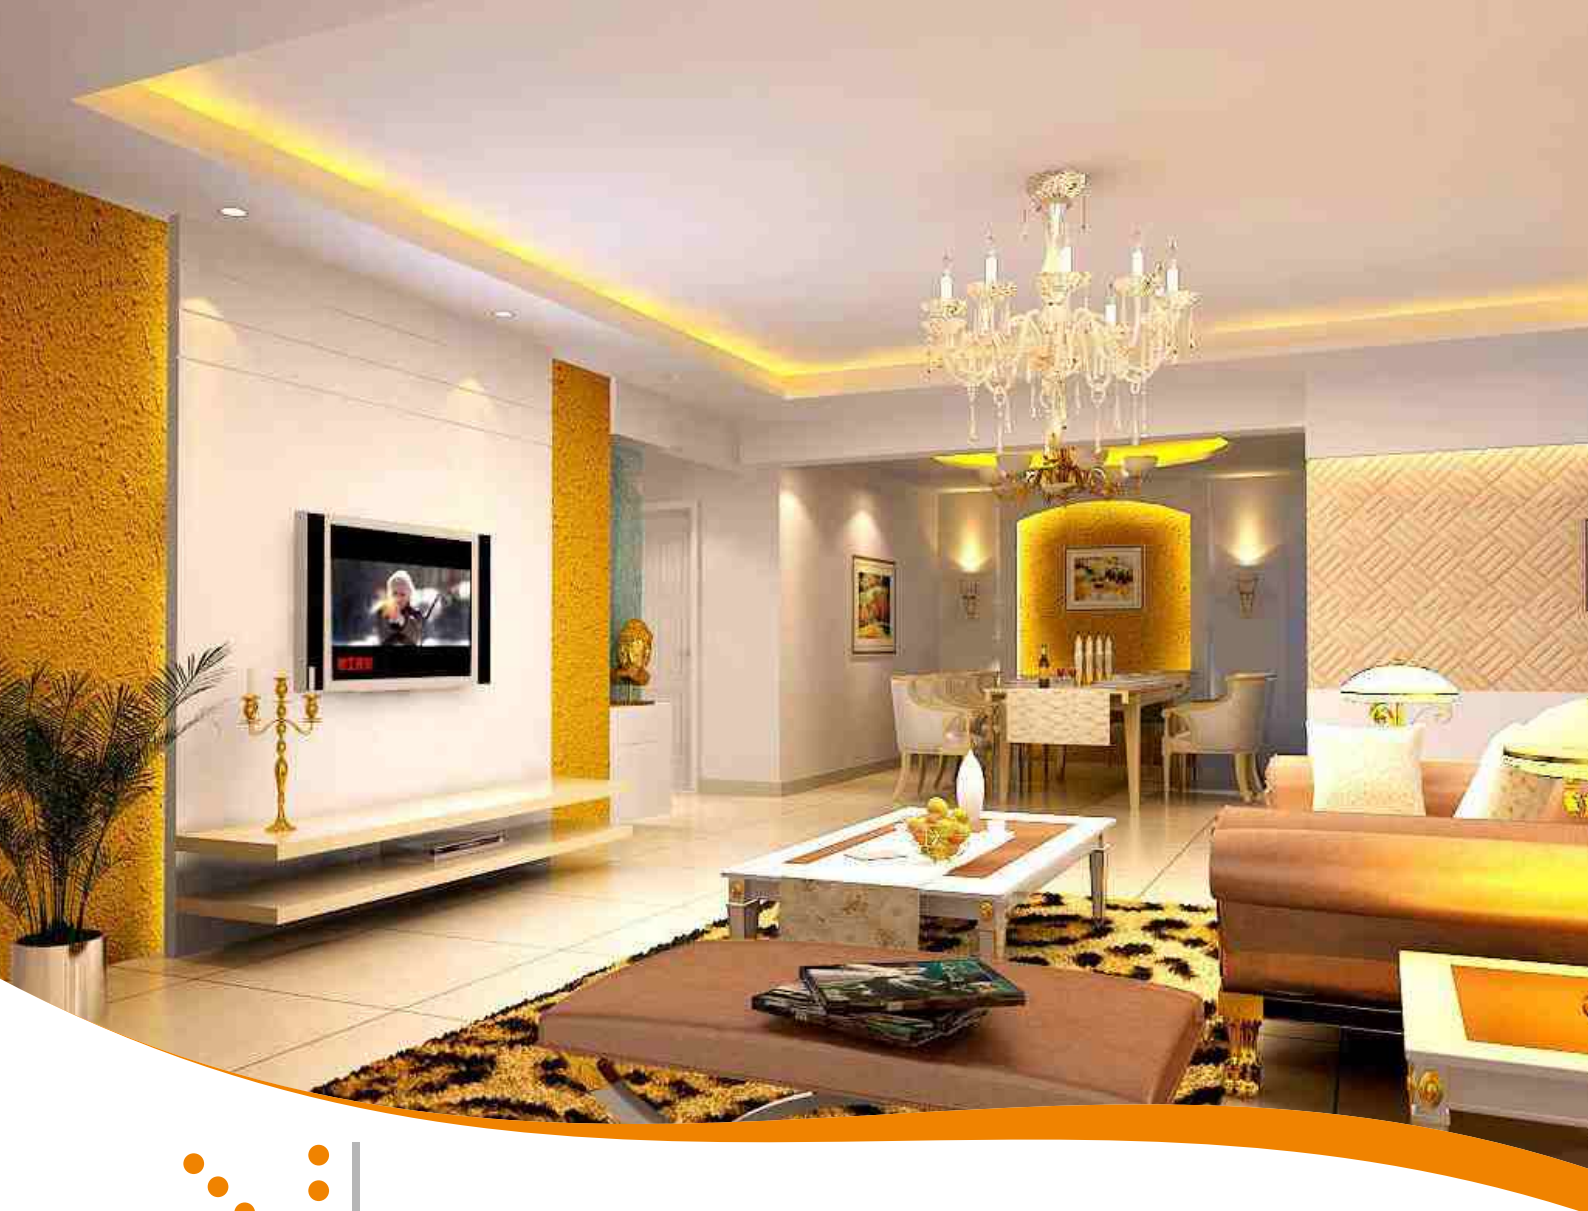

# LED STRIP LIGHTS

## LED Strip Lights

### Features:

- Many kinds of single color light: Red, Green, Yellow, White etc.
- IP 20, IP 65 and IP 68 for choice.
- Ultraviolet-proof and anticorrosive material and high quality LED source to ensure long life span.
- CE RoHS certification, 2 years warranty.

### Application:

- shopping mall, coffee shop, furniture decoration, car decoration, party decoration, underwater engineering lighting.



Model	Power	Size	LED Type	Color
HL-3528-60	4.8W/m	5 meters/roll	SMD 3528	R/G/B/Y/W
HL-3528-120	9.6W/m	5 meters/roll	SMD 3528	R/G/B/Y/W
HL-5050-30	7.2W/m	5 meters/roll	SMD 5050	R/G/B/Y/W/RGB
HL-5050-60	14.4W/m	5 meters/roll	SMD 5050	R/G/B/Y/W/RGB

## ODM Module



Russia Client ODM Module



USA Client ODM Module